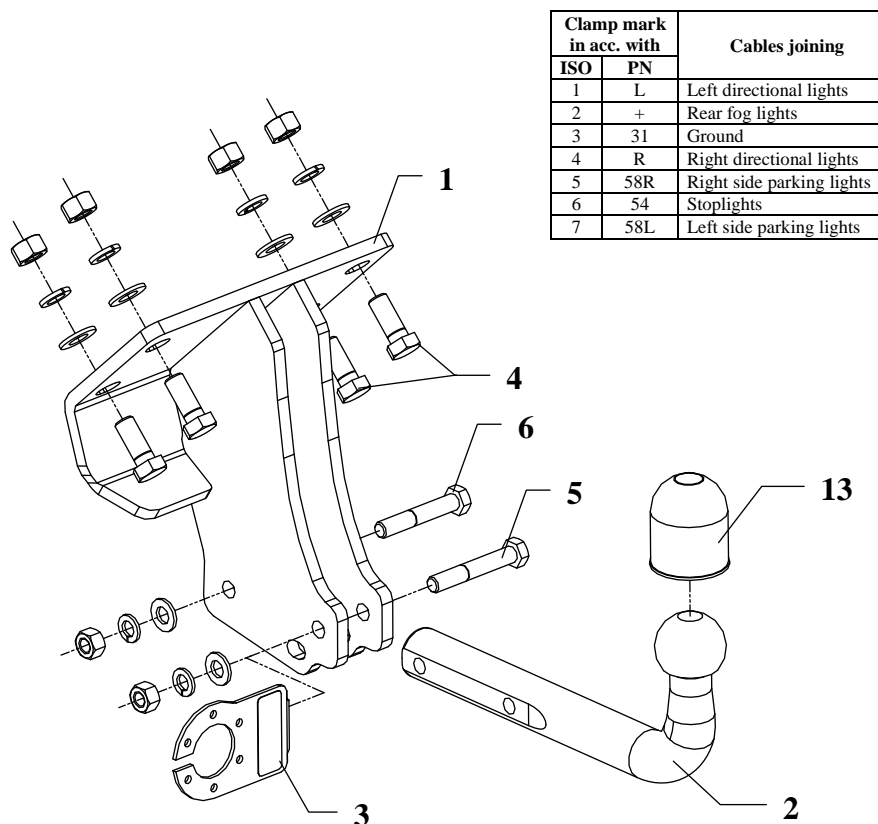


FITTING INSTRUCTION



This towing hitch is designed to assembly in following cars:
MERCEDES G-Class, (W461, W463) produced since 12.1989, catalogue
 no. **D25** and is prepared to tow trailers max total weight **3500 kg** and max
 vertical mass **120 kg**.

From manufacturer

Thank you for buying our product. Their reliability has been confirmed in
 many tests. Reliability of towing hitch depends also on correct assembly and right
 operation. For this reasons we kindly ask to read carefully this instruction and
 apply to hints.

The towing hitch should be install in points described by a car producer.

The instruction of the assembly

1. Apply main plate of towbar (pos. 1) to the car this way, so
 holes of plate agree with holes in the car. Fix plate using 4
 bolts M14x35mm (pos. 4) from accessories.
2. Fix tow-ball (pos. 2) with socket plate (pos. 3) using bolts
 M12x75mm (pos. 5) and M12x70mm (pos. 6) from
 accessories.
3. Tighten all bolts according to the torque shown in the table.
4. Connect electric wires of 7-poles socket according to the
 instruction of the car. (Recommend to make at authorized
 service station).
5. Complete paint layer damaged during installation.

Torque settings for nuts and bolts (8,8):

| | | |
|---------------------|----------------------|---------------------|
| M6 - 11 Nm | M 8 - 25 Nm | M 10 - 50 Nm |
| M 12 - 87 Nm | M 14 - 138 Nm | M16 - 210 Nm |














NOTE

After install the towing hitch you should get adequate note in registration
 book (at authorised service station). The car should be equipped with:

- Indicators
- Tow mirrors

After 1000km of exploitation check all bolts and nuts. The ball of towing
 hitch must be always kept clear and conserve with a grease.

Towing hitch accessories:

| | | | | | |
|-----------|---|-----------|---|------------|--|
| Pos. 1 | Main plate  | Pos. 5 | Bolt 8,8 B M12x75mm  | Pos. 10 | Spring washer ø12,2mm  |
| PCS.: 1 | | PCS.: 1 | | PCS.: 2 | |
| Pos. 2 | Tow ball  | Pos. 6 | Bolt 8,8 B M12x70mm  | Pos. 11 | Nut 8 B M14  |
| PCS.: 1 | | PCS.: 1 | | PCS.: 4 | |
| Pos. 3 | Socket plate  | Pos. 7 | Plain washer ø15mm  | Pos. 12 | Nut 8 B M12  |
| PCS.: 1 | | PCS.: 4 | | PCS.: 2 | |
| Pos. 4 | Bolt 8,8 B M14x35mm  | Pos. 8 | Plain washer ø13mm  | Pos. 13 | Ball cover  |
| PCS.: 4 | | PCS.: 2 | | PCS.: 1 | |
| | | Pos. 9 | Spring washer ø14,2mm  | | |
| | | PCS.: 4 | | | |



PPUH AUTO-HAK Sp.J.

Produkcja Zaczepów Kulowych
Henryk & Zbigniew Nejman
76-200 SŁUPSK ul. Słoneczna 16K
tel/fax (059) 8-414-414; 8-414-413
E-mail: office@autohak.com.pl
www.autohak.com.pl

Towing hitch (without electrical set)

Class: **A50-X** Cat. no. **D25**

Designed for:

Manufacturer: **MERCEDES**

Model: **G-Class**

Type: **(W461, W463)**

produced since 12.1989

Technical data:

D-value: 13,6 kN

maximum trailer weight: **3500 kg**

maximum vertical cup mass: **120 kg**

Approval number according to Directive 94/20/EC: e20*94/20*0624*00

Foreword

This towing hitch is designed according to rules of safety traffic regulations. The towing hitch is a safety component and can be install only by qualified personnel. Any alteration or conversion of the towing hitch is prohibited and would lead to cancellation of design certification. Remove insulating compound and underseal from vehicle (if present) in the area of the matting surfaces of the towing hitch. The vehicle manufacturer's specifications regarding trailer mass and max. vertical cup mass are decisive for driving whereat values for the towing hitch cannot be exceeded.

D-value formula:

$$\frac{\text{Max trailer weight [kg]} \times \text{Max vehicle weight [kg]}}{\text{Max trailer weight [kg]} + \text{Max vehicle weight [kg]}} \times \frac{9,81}{1000} = D \text{ [kN]}$$